

**Key:**

Undertile Membrane (by others)	— — —
StrataBit Capsheet	— — —
StrataBase Underlay	— — —
StrataTherm Insulation	— — —
StrataVap Air & Vapour Control Layer	— — —

**Construction Note:**

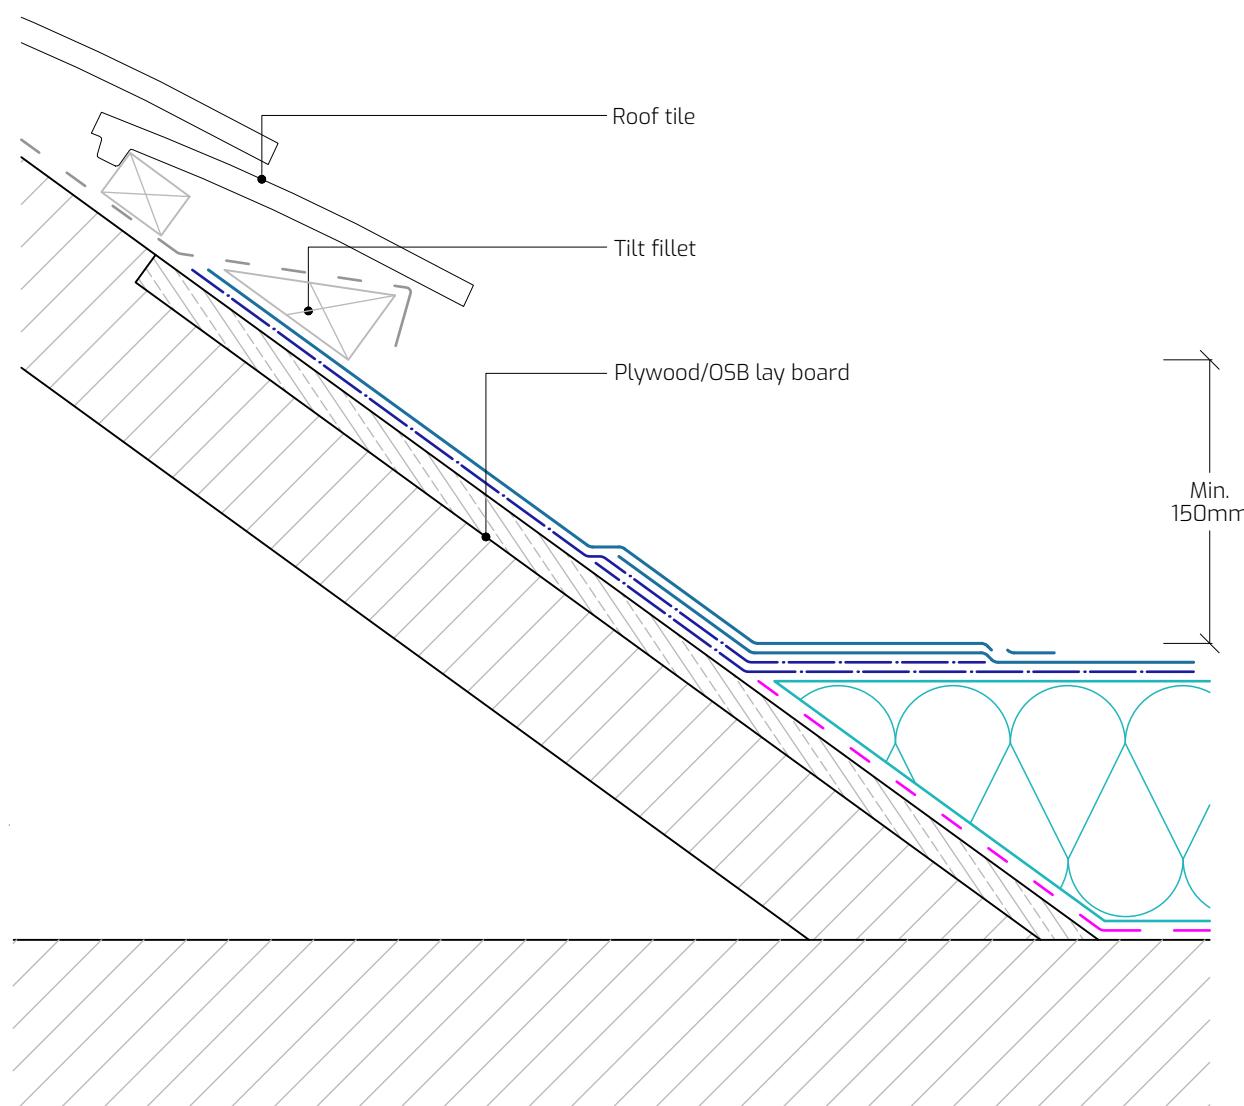
Apply a timber lay board to the bottom of the rafters. This infill should be notched into, and mechanically fastened to the rafters, with an appropriate height to achieve a min. 150mm upstand measured from the finish roof level.

Upon completion of the detailing works, provide a tilting fillet beneath the bottom tile as indicated. Then, dress the under tile membrane and fix tiling battens and tiles/slates to provide a minimum cover of 75mm to the new waterproofing.

The system build-up and application should adhere to the STRATA issued specification.

All surfaces must be clean, dry, and suitably prepared to accept the waterproofing system.

All details should be installed in full compliance with the most up-to-date NHBC Standards, BS 8217, BS 6229, and STRATA recommendations.

**Drawing Title:** Pitched Roof Abutment**Drawing Number:** SB-T0-W18**Scale:** 1:4**Drawn By:** E.V.**Date:** 19/09/2025T: 028 9030 2924 | E: [technical@stratawaterproofing.com](mailto:technical@stratawaterproofing.com) | W: [www.stratawaterproofing.com](http://www.stratawaterproofing.com)

Copyright Reserved - Please note that this drawing and the copyright therein is the property of Strata Waterproofing Systems and is issued on the understanding that the drawing or any detail thereof shall not be divulged to a third party unless written permission is first obtained from Strata Waterproofing Systems. The drawing is valid only when approved by the Architect/Contractor concerned.

This detail is representative of a typical situation and provided for illustration purposes. Insulation thickness shown may differ in accordance with the specified U-value requirement.

