

**Key:**

StrataPlan GF Membrane



StrataPrime Fleeceback Adhesive



Hot Air Weld



StrataShield Air &amp; Vapour Control Layer

**Construction Notes:**

The StrataPlan GF Membrane should be fixed at the perimeters with fixings positioned at 150mm centres or in accordance with the site-specific wind load calculations.

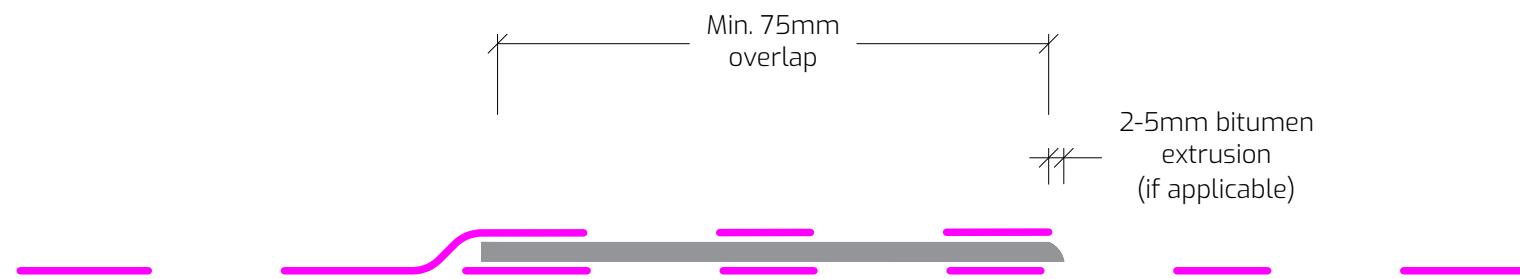
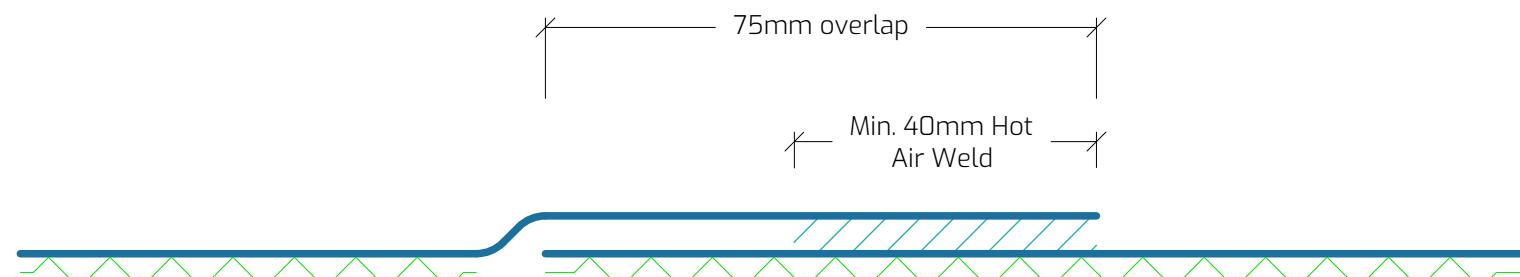
For cold roof construction pressure plates should be utilised for fixing the membrane.

Depending on the specified type of air and vapour control layer (AVCL) and the environmental conditions, extrusion of bitumen may be required.

The system build-up and application should adhere to the STRATA issued specification.

All surfaces must be clean, dry, and suitably prepared to accept the waterproofing system.

All details should be installed in full compliance with the most up-to-date NHBC Standards, BS 6229, and STRATA recommendations.

**Drawing Title:** Membrane Overlap

Drawing Number: SP-GF-W01

Scale: 1:1

Drawn By: E.V.

Date: 26/09/2025

T: 028 9030 2924 | E: [technical@stratawaterproofing.com](mailto:technical@stratawaterproofing.com) | W: [www.stratawaterproofing.com](http://www.stratawaterproofing.com)

Copyright Reserved - Please note that this drawing and the copyright therein is the property of Strata Waterproofing Systems and is issued on the understanding that the drawing or any detail thereof will not be divulged to a third party unless written permission is first obtained from Strata Waterproofing Systems. The drawing is valid only when approved by the Architect / Contractor concerned.

This detail is representative of a typical situation and provided for illustration purposes. Insulation thickness shown may differ in accordance with the specified U-value requirement.

